


STANDARD

440 SM&SMSS

1" = 1'-0"

Jug Filler

Most Dependable Fountains, INC.
 5705 Commander Dr. PO Box 587
 Arlington, TN 38002
 Phone: (901-867-0039)
 www.mostdependable.com

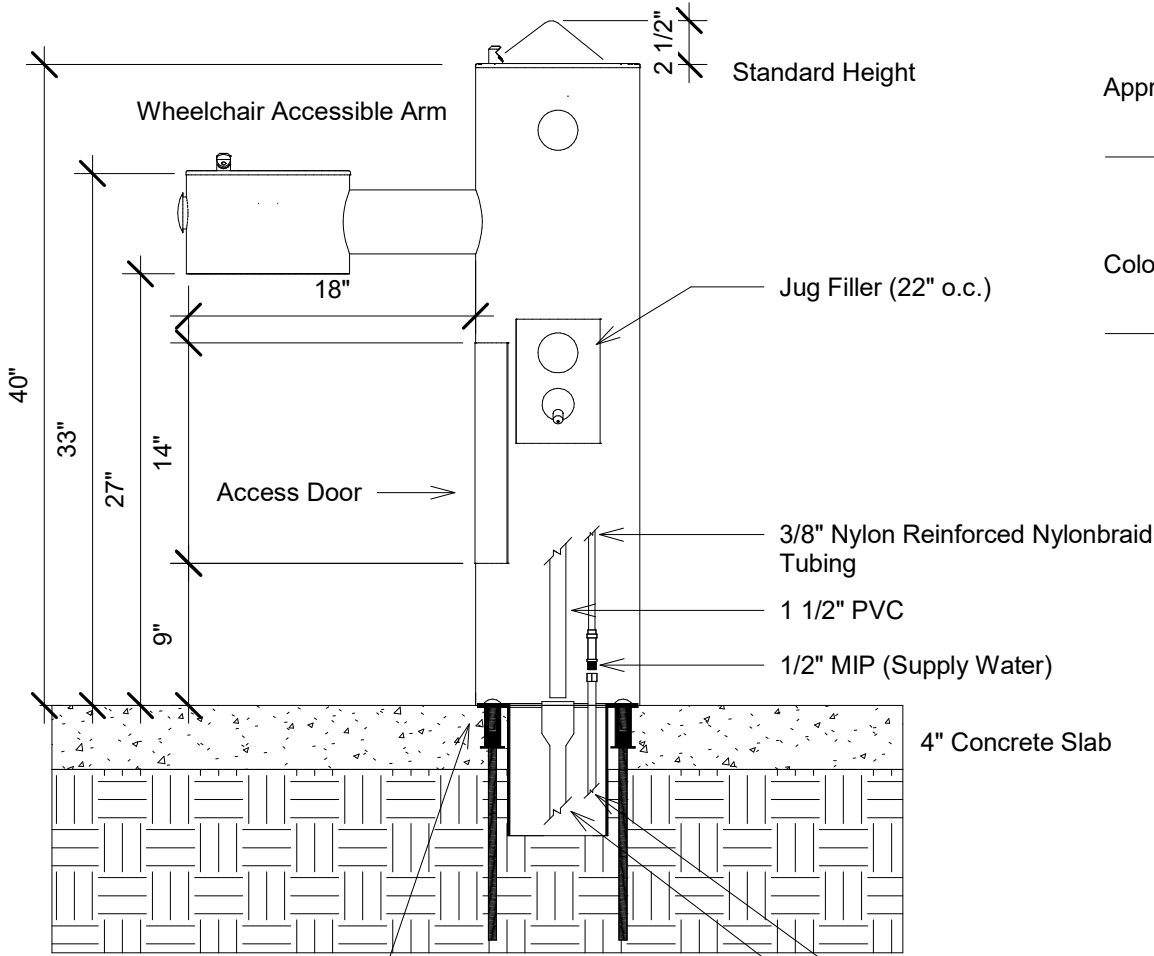

Approval Signature: _____

Color Selection: _____

Select Material Type:


- 304 Stainless Steel
- 316 Stainless Steel

Installation Option


- Internal Surface Mount
- Unattached Valve Box
- Cut Off Low Point Drain

Optional Internal Surface Mount

Supply Line By Other
 Drain Line By Other

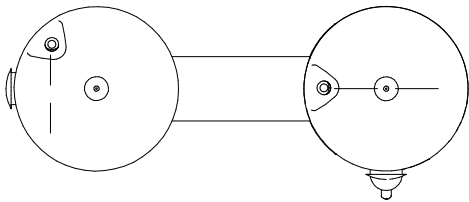

Point of Approach/
 Front

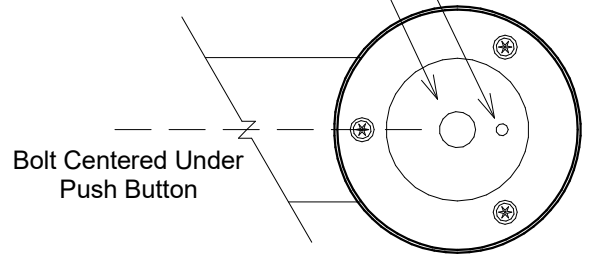

— Water Stream Path

⊗ Surface Mounting Bolt Location

ADA Clearance Note:
 30" Minimum width from
 center of ADA push button.

